




Mounting instructions

1058




--	--	--	--	--	--	--	--	--	--	--	--	--

⚡ WARNING

Before proceeding with installation or service maintenance of this product.


- Disconnect power to reduce electrical shock risk.
- Review the entire Installation Guide.
- Inspect this properly packaged product for any damage that may have occurred during transit.
- Verify product application complies with manufacturer design recommendations.
- Verify the availability of necessary tools and incidental material.
- Verify applicable code requirements. Field assembly and installation are subject to acceptance by local inspection authority.
- Appropriate safety equipment to be determined by end user, per applicable safety standards and precautions.

▶ INSTALLATION STEPS

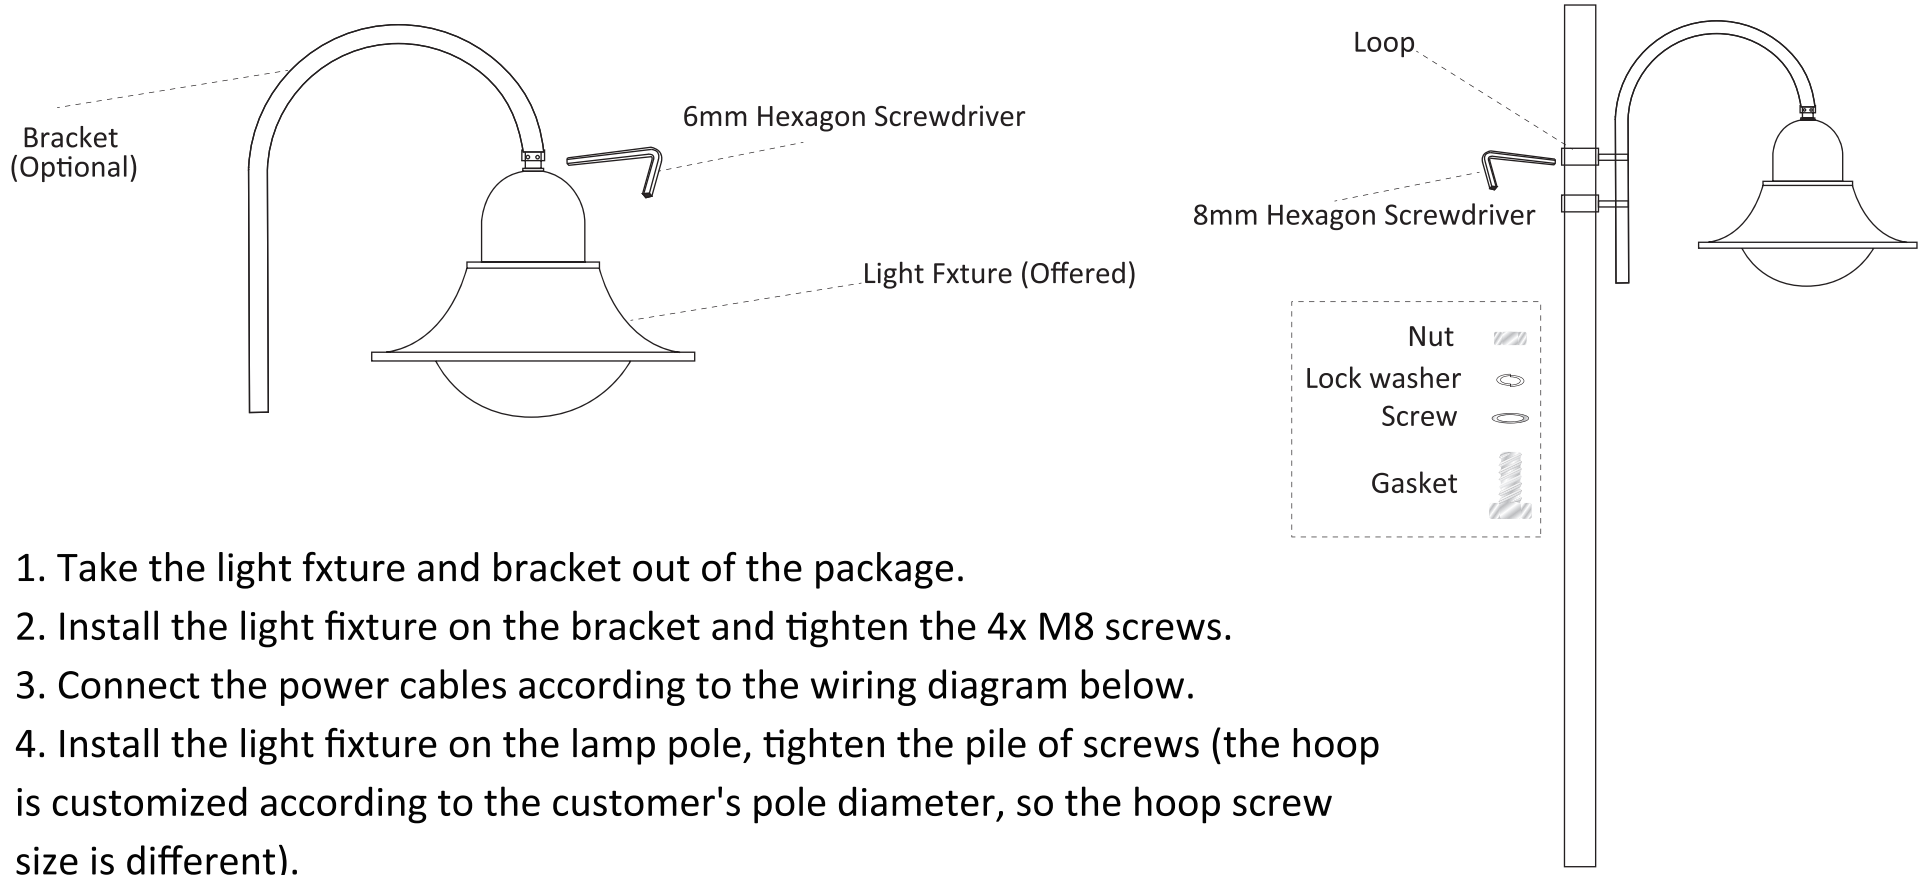


1. Take the light fixture and bracket out of the package.
2. Install the light fixture on the bracket and tighten the 4x M8 screws.
3. Connect the power cables according to the wiring diagram below.
4. Install the light fixture on the lamp pole, tighten the pile of screws (the hoop is customized according to the customer's pole diameter, so the hoop screw size is different).

Wiring Diagram 1 - Class I BASED

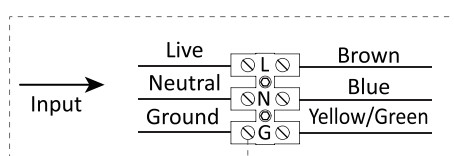

Wiring Diagram 2 - Class II BASED

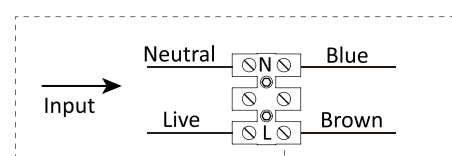

Note: Input cable should be at least H05RN-F 3x1.0mm²(Class I) or 2x1.0mm²(Class II) (SJTW 18AWG) or outdoor grade cable with rubber sheathed (not supplied). The cable must have a minimum cross sectional area of 1.0mm²(18AWG).