LED GROW LIGHT INSTALLATION GUIDE




Efficacy	2.60-2.80 μmol/J @ 240V AC		
	(Can be customized		
	according to request)		
AC Input Voltage	AC 100-240V /277V, 50 /60Hz		
Light Distribution	120°		
Mounting Height	6" - 12" (15.2-30.5cm)		
	Above Canopy		
Thermal Management	Passive		
Working Environment	< 40°C, 10% ~ 90%RH		
Dimming	0-10V,		
	Knob Stages: OFF- 25- 50- 75- 100%		
	 EXT (External Dimming enable when dimmer connected.) 		
Lifespan L90 at 25 °C	> 50,000 hours		
	(11.4 years @ 12 hours/day)		
IP Rating	IP65		
Warranty	5 Years		


CAUTION


- Installation and maintenance must be performed by professionals only.
- Please ensure the holder is strong enough and the screws are tightened.
- The ground wire must be securely connected.
- Please make sure the lamp is working with correct input voltage.
- Cut off the power before maintenance.
- Do not use chemicals or corrosive cleaner to clean the fixture.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by a qualified person in order to avoid a hazard.

Bar	Nominal Wattage	Light Output PPF	Fixture Dimension	Fixture Weight	Packing Type
4 Bars	420W	1092-1176 μmol/s	1100 x 508 x 127 mm	7.0 kg	1unit /ctn
6 Bars	650W	1690-1820 μmol/s	1100 x 760 x 127 mm	10.5 kg	1unit /ctn
7 Bars	750W	1950-2100 μmol/s	1100 x 886 x 127 mm	11.5 kg	1unit /ctn

MOUNTING & CONNECTION INSTRUCTIONS

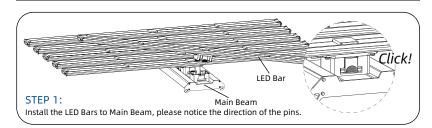

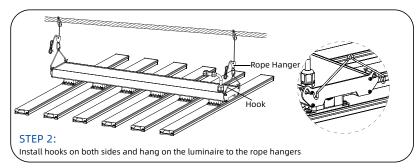

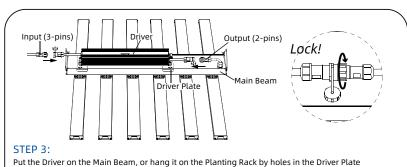

(need to customize the length of the output cable), then connect and lock the output and input

Product Parts List (default)



Main Bean x1



 420W
 650W
 750W

 LED Bar x4
 LED Bar x6
 LED Bar x7



LED Driver with Plate x1

Input Cable x1






Hook x2

Rope Hanger x2

Product Parts List (Order On Request)



Snap Hook & Wire sling

Plug (US, EU, UK)

RJ14 Cable

connectors to the Driver.